


**INSULFOAM®**

# ROOF INSULATION SYSTEMS



**CONSISTENTLY PREDICTABLE VALUE**



INSULATION ENGINEERED TO MAKE A DIFFERENCE.

For over 50 years, Insulfoam has been enabling building professionals to construct high-quality single-ply roofing systems at a minimal cost.


Insulfoam has the widest range of faced, laminated and standard high-performance EPS insulation products for all your new and re-roofing needs, while providing significant material cost savings.

- **Highly customizable:** Thickness up to 40" in a single board
- **Versatile:** Virtually any taper/slope and shape
- **Significant labor savings:** Fewer layers required to achieve R-values
- **Significant cost savings:** Compared to competing rigid insulations like Polyiso and XPS
- **Extremely durable:** Available in compressive strengths up to 60 psi
- **Weather resistant:** High-density laminated products provide protection against the harshest weather, including hail and ice
- **Extensive code approvals:** Compatible with almost all single-ply roofing systems
- **Ease of installation:** Lightweight, conveniently sized panels
- **HIGHEST R-value per dollar**




## The Insulfoam Advantage:

- Over 50 years of manufacturing expertise
- End-to-end consulting: Insulfoam assists with design, manufactures, delivers, and provides consultative assistance during installation
- Dedicated R&D center: cutting-edge of testing and code-compliance (ICC-ES, UL, FM)
- Can contribute toward LEED® credit requirements
- Long-term thermal warranty coverage
- **Nationwide coverage: 10 U.S. manufacturing locations**

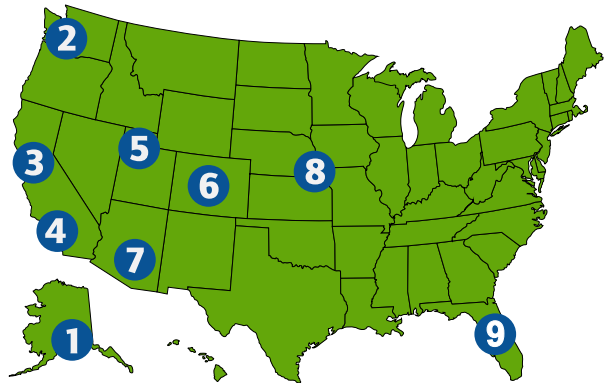

## Insulfoam can give you THE COMPETITIVE EDGE:

### Material Savings Over Other Insulations

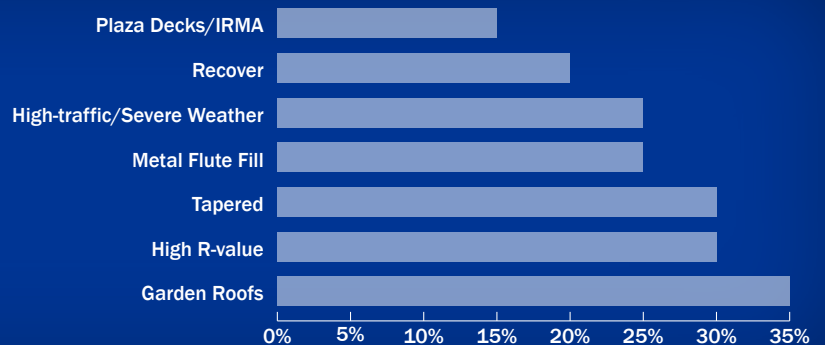

## Black vs. White:

The impact of roof color on energy-efficiency is a top concern for design professionals. Extensive research is being done to understand how a black (EPDM, ballasted) or white (PVC, TPO, White EPDM) roof, in different climate zones, can impact a building's energy consumption.

Insulfoam insulation solves a part of that puzzle by being compatible with both dark- and light-colored single-ply membranes.

- Installing a black roof in cold climate zones?  
Use InsulRoof SP or R-Tech (metallic side up) for recover applications.
- Re-covering a white roof in the southern U.S.?  
Use R-Tech for recover applications. Use InsulRoof SP or InsulRoof HD Composite for extra protection from hail and ice.



Whatever the color of your roof, Insulfoam has an insulation product that will increase your building's energy efficiency.

## Long-term is the Right Term – LTTR R-values and Insulfoam Insulations:


The roofing industry was rocked in January 2014 with the change in LTTR R-value testing, which resulted in lower R-values for various thicknesses in many insulations, that can lose their thermal stability over time. But this did not affect Insulfoam insulations.

Insulfoam utilizes sustainable manufacturing processes, using raw materials that retain their thermal properties long term. Because of their R-value retention, Insulfoam products are covered by Insulfoam's 100% R-value warranty. With Insulfoam, you get what you pay for: an insulation product that retains its original R-value.

## Hybrids Fight the High Bid – Add Insulfoam To Be Competitive:

In addition to being compliant with virtually every single-ply roof system, Insulfoam insulation can help you edge out the competition when used in combination with other specified roofing insulations:

- **Tapered:** With 40" thicknesses and virtually any slope available in a single board, a base layer of tapered Insulfoam can save you over 30% in product cost alone, with additional savings on installation time.
- **Standing Seam Metal Roofs:** With square-, taper- and profile-cut flute-fill products of custom shapes and sizes, Insulfoam has a solution for your metal roof.
- **Roof Garden:** With up to 60-psi compressive strength and customizable shapes, Insulfoam can help you shape the roof garden of your dreams.

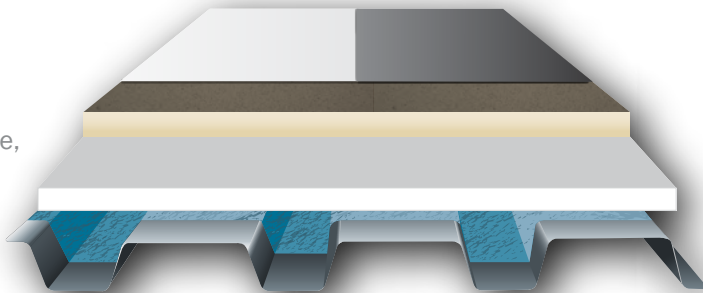

# Weighed down with Ballast? Insulfoam can lighten your load.

Ballasted roofs are back! Known as the original cool roof, ballasted roofs are both economical and sustainable as a long-lasting, energy-efficient weatherproofing system.

Insulfoam insulations can be tailor-made for ballasted roofs:

- UL Class-A for all decks and approved membranes.
- Insulfoam can be installed direct-to-deck.
- High compressive strength to support the weight of ballast and live loads.
- Highest R-value per dollar, making your total ballasted roof system economical.

## Direct to Metal – Insulfoam Has Got Your Back:

Insulfoam insulations can be applied directly on top of metal decks:

- Meet International Building Code (IBC) Chapter 26 requirements for direct-to-deck applications on metal roofs.
- Pass UL 1256 without the need for a thermal barrier.


Combining compliance with economy, Insulfoam can help you offset the cost of a quality metal deck by lowering the total system cost.



## Design & Build Single-Ply with Insulfoam

So how can you use Insulfoam with a single-ply roof system? See below for examples of common code-compliant systems. For more information, contact your local Insulfoam sales representative.

Building a tapered roof or compound drainage system? Contact Insulfoam's team of in-house design experts at [DesignCenter@Insulfoam.com](mailto:DesignCenter@Insulfoam.com).

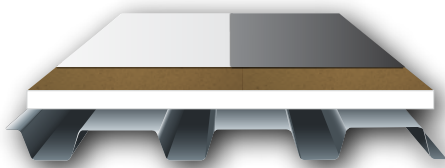

### Metal Deck

- InsulRoof SP
- Mechanically attached EPDM/PVC/TPO/FleeceBACK® (FB) - black or white membrane



### Concrete Deck

- InsulLam with foam adhesive
- Fully adhered EPDM/PVC/TPO/FB - black or white membrane




### Wood Deck

- Insulfoam HD Composite
- Adhered with foam adhesive (R-19+ complies with California Title 24)
- Adhered EPDM/PVC/TPO/FB - black or white membrane




### R-TECH Recover Panels or FanFold

- Facers compatible with dark- or light-colored membranes
- Mechanically attached EPDM/PVC/TPO/FB - black or white membrane

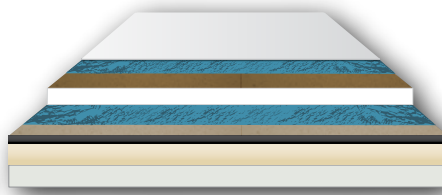

### FleeceBACK BUR Recover

- InsulRoof SP
- FleeceBACK membrane (approved thickness) adhered with foam adhesive

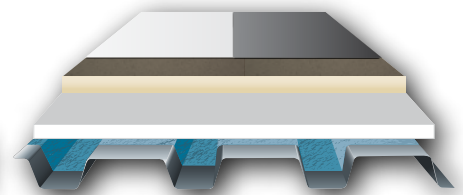

### Hybrid System

- Tapered Insulfoam adhered with foam adhesive
- 2" Polyisocyanurate insulation
- Adhered EPDM/PVC/TPO/FB - black or white membrane

# Code-Compliant Insulation For All Decks

Decades of research and testing have helped Insulfoam develop insulation systems that are code-compliant with all major roof decks.

This table lists popular applications of Insulfoam in UL-approved roof systems.

DECK	STEEL			CONCRETE			WOOD/COMBUSTIBLE		
	Fully Adhered	Mechanically Attached	Ballasted	Fully Adhered	Mechanically Attached	Ballasted	Fully Adhered	Mechanically Attached	Ballasted
<b>InsulRoof EPS</b>	InsulRoof with coverboard	InsulRoof with slipsheet or coverboard	InsulRoof	InsulRoof with coverboard	InsulRoof with slipsheet or coverboard	InsulRoof	InsulRoof with min. ¼" gyp coverboard	InsulRoof with min. ¼" gyp coverboard	InsulRoof
<b>Tapered InsulRoof</b>	InsulRoof with coverboard	InsulRoof with slipsheet or coverboard	InsulRoof	InsulRoof with coverboard	InsulRoof with slipsheet or coverboard	InsulRoof	InsulRoof with min. ¼" gyp coverboard	InsulRoof with min. ¼" gyp coverboard	InsulRoof
<b>R-TECH® FF Fanfold Roofing Underlayment (Recover)</b>	<i>Not Applicable</i>	R-TECH FF	R-TECH FF	<i>Not Applicable</i>	R-TECH FF	R-TECH FF	<i>Not Applicable</i>	R-TECH FF	R-TECH FF
<b>R-TECH® Roofing Underlayment (Recover)</b>	<i>Not Applicable</i>	R-TECH	R-TECH	<i>Not Applicable</i>	R-TECH	R-TECH	<i>Not Applicable</i>	R-TECH	R-TECH
<b>InsulRoof SP</b>	InsulRoof SP with compatible adhesive or Peel & Stick membrane	InsulRoof SP	InsulRoof SP	InsulRoof SP with compatible adhesive or Peel & Stick membrane	InsulRoof SP	InsulRoof SP	<i>Not Applicable</i>	<i>Not Applicable</i>	InsulRoof SP
<b>InsulRoof HD Composite</b>	UL Class A	InsulRoof HD	InsulRoof HD	InsulRoof HD	InsulRoof HD	InsulRoof HD	InsulRoof HD with min. 4½" thickness	InsulRoof HD with min. 4½" thickness	InsulRoof HD with min. 4½" thickness
<b>InsulRoof FL</b>	InsulRoof FL with coverboard	InsulRoof FL with coverboard or combined with InsulFoam SP	InsulRoof FL	<i>Not Applicable</i>	<i>Not Applicable</i>	<i>Not Applicable</i>	<i>Not Applicable</i>	<i>Not Applicable</i>	<i>Not Applicable</i>
<b>InsulLam™</b>	InsulLam	InsulLam	InsulLam	InsulLam	InsulLam	InsulLam	InsulLam with min. ¼" gyp coverboard	InsulLam with min. ¼" gyp coverboard	InsulLam

## Roofing Insulation Products

### InsulRoof I, VIII, II, IX, XIV and XV


Flat and Tapered –  
EPS Roofing Insulation

#### Application

All roofing and reroofing applications. Tapered panels used for increasing slope for additional drainage.

#### Characteristics

Available in compressive strengths from 10-60 psi, flat thicknesses of ½" to 40", and tapered start thicknesses of ⅛" to maximum thicknesses of 40"; multiple slopes available.

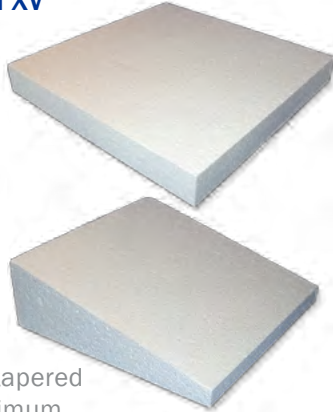

### InsulRoof SP


InsulRoof with a Factory-laminated Glass Facer

#### Application

For recover or new applications, approved for single-ply roof systems without an additional slip sheet on non-combustible decks.

#### Characteristics

Available in thicknesses 1½" - 7", 4' x 4' and 4' x 8' panels.

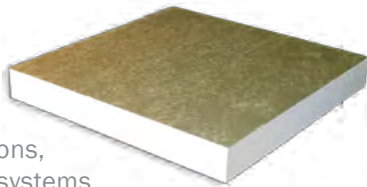

### InsulRoof HD Composite

½" High Density Polyiso Bonded to InsulFoam

#### Application

For new construction or recover applications approved for single-ply roof systems.

#### Characteristics

Available with ½" 100 psi high density polyiso bonded to InsulFoam in compressive strengths from 10-60 psi, thicknesses 1½" - 6", 4' x 4' and 4' x 8' panels.



### InsulLam

Composite EPS Insulation

#### Application

High performance nailbase insulation for use in commercial and residential roof applications.

#### Characteristics

Standard substrates include OSB, Plywood, Gypsum and other cover boards, 4' x 4', 4' x 8' panels are available in thicknesses of 1½" - 7".



Also available vented as InsulVent.

### R-TECH


Recover Roof Insulation

#### Application

For recover applications, approved for use under single-ply roof systems without the use of a slip-sheet.

#### Characteristics

4' x 8' panels in thicknesses of ⅜" - 1".

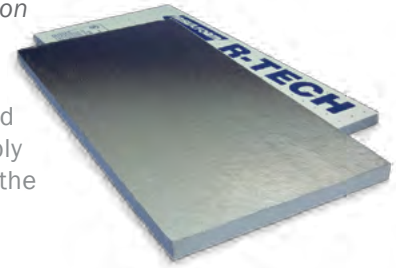

### R-TECH FF

Fanfold Underlayment

#### Application

For recover applications, approved for use under single-ply roof systems without the use of a slip-sheet. EPDM is acceptable in the northern US.

#### Characteristics

Available in 200 sq. ft. fanfold bundles with thicknesses of ⅜", ½", or ¾".



### InsulRoof FL

Flute Fill

#### Application

Recover insulation for existing metal roof profiles.

#### Characteristics

Available in taper, straight, or custom-cut profiles to fit any metal roofing system.



### InsulRoof HB


Holey Board

#### Application

For use in lightweight concrete systems.

#### Characteristics

Typically provided in 2' x 4' panels in thicknesses from ¾" to 20".

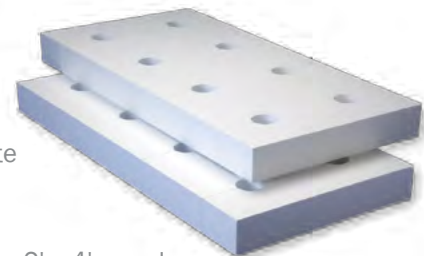



[www.Insulfoam.com](http://www.Insulfoam.com)

Tel: 800-248-5995

Headquartered in Washington State

Manufacturing in: Alaska - Arizona - California - Colorado  
Florida - Nebraska - Utah - Washington

Insulfoam, R-Tech and InsulLam are trademarks of Insulfoam.  
FleeceBACK is a trademark of Carlisle. © 2016 Insulfoam.  
11000-8/16