

# INSULFOAM®

**HD** HYBRID ROOF INSULATION

PREMIUM HIGH-DENSITY LAMINATED INSULATION

## Description

InsulFoam HD Composite (InsulFoam HD Composite) is an engineered insulation consisting of a closed-cell, lightweight and resilient expanded polystyrene (EPS) bonded to high-density polyisocyanurate cover board.

- Achieves UL Class A without gypsum or any other coverboard.
- Continuous above deck – satisfies California Title 24 requirements at lower R-value.
- Significant cost savings over other coverboards and traditional insulations.
- Effective application – installed above deck, therefore no interruption due to joists.
- Easy to install – lightweight, factory bonded panels.
- Compatible with all fully adhered or mechanically attached EPDM, PVC, TPO and CSPE membranes.
- Will meet or exceed the requirements of ASTM C578, the standard specification for rigid, cellular polystyrene thermal insulation.
- Excellent choice for new or retrofit applications where high thermal efficiency and maximum durability are desired.


## Uses

- Mechanically fastened, ballasted or fully adhered EPDM, TPO or PVC.
- Low-sloped, built-up and modified bitumen membrane systems.
- Underlayment for metal roofing systems and some peel-and-stick systems.

## Advantages

- **System Enhancement:** InsulFoam HD Composite provides additional resistance to misuse, abuse and adverse weather conditions, such as high winds and severe hail.
- **Environmentally Friendly:** The InsulFoam HD Composite core does not contain any ozone-depleting blowing agents, may contain recycled material and is 100% recyclable if ever removed or replaced.
- **Stable R-value:** The product's thermal properties will remain stable over its entire service life. There is no thermal drift, so the product is eligible for an Insulfoam 20-year thermal performance warranty.
- **Water Resistance:** The InsulFoam HD Composite core does not readily absorb moisture from the environment.
- **Economical:** InsulFoam HD Composite provides significant cost savings over other coverboards and traditional insulations. It is easy to install and lightweight with factory bonded panels.

PREDICTABLY CONSISTENT VALUE.

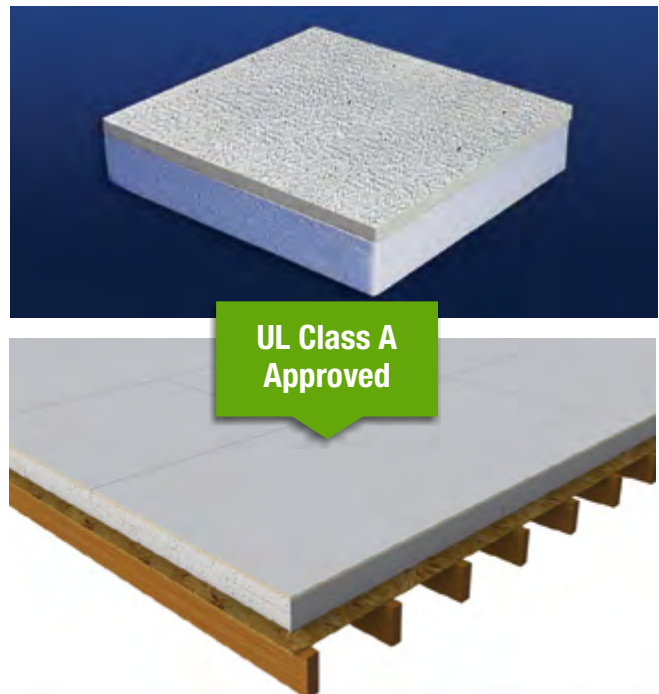

- **Code Approvals:** InsulFoam HD Composite achieves UL Class-A without gypsum or other coverboards. And because InsulFoam HD Composite is a continuous above deck insulation, it satisfies California Title 24 requirements at a lower R-value.

## Sizes

InsulFoam HD Composite is available in 4' x 8' sizes with overall thickness from 1.5" to 6", and is available in custom lengths and widths with little to no impact on lead time.

## Installation Recommendations

- **Mechanically Attached:** InsulFoam HD Composite should be installed using a minimum of 5 fasteners, with insulation plates per 4' x 8' board prior to placement and fastening of roof membrane.
- **Adhered:** Requires attachment to the deck with EPS compatible roof insulation adhesives or fastened with a minimum of one fastener every two square feet.
- Recommended fastening patterns are available in the Insulfoam Roofing Manual.

PREDICTABLY **CONSISTENT** VALUE.

# **INSULFOAM**<sup>®</sup>

**HD** HYBRID ROOF INSULATION  
PREMIUM HIGH-DENSITY LAMINATED INSULATION

## R-values:

Typical Thicknesses and Thermal Values for InsulFoam HD Composite						
Nominal Thicknesses (including ½" HD ISO)	1.5"	2.0"	3.0"	4.0"	5.0"	6.0"
R-value @ 25 °F	6.85	9.02	13.38	17.72	22.08	26.42
R-value @ 40 °F	6.67	8.76	12.93	17.10	21.27	25.44
R-value @ 75 °F	6.37	8.30	12.13	15.98	19.83	23.68

INSULATION ENGINEERED TO MAKE A DIFFERENCE.