


R-TECH®

BELOW GRADE INSULATION

BY **INSULFOAM**

R-TECH X · 15 PSI PREMIUM FACTORY FACED MOISTURE RESISTANT INSULATION

TIME TESTED PROTECTION.

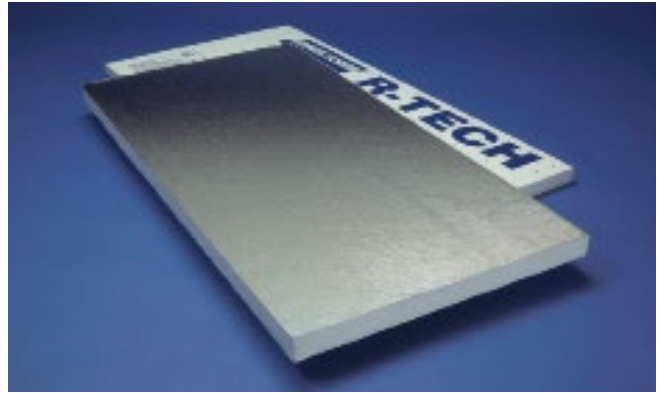

Description

R-Tech® X is an engineered rigid insulation developed to be an alternative equal in applications where Type X extruded polystyrene (XPS) is specified. R-Tech X consists of a superior closed-cell, lightweight and resilient expanded polystyrene (EPS) with advanced polymeric laminate facers. The core of R-Tech X is the same high-quality EPS as our InsulFoam insulations and meets or exceeds the compressive strength, flexural strength, dimensional stability and water absorption requirements of ASTM C578, Type X Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation. R-Tech X is available with factory laminated metallic-reflective facers, white facers or a combination of the two. In addition, R-Tech X offers a long-term stable R-Value, is an energy-saving insulation, and can contribute toward LEED® credits.

Uses

R-Tech X Below Grade Insulation is successfully used in numerous commercial, industrial and residential applications, insulating the foundation wall or slab and protecting the waterproofing or damp proofing, especially during backfilling. The following are examples of the many applications:

- Architectural Shapes
- Below-grade Insulation
- Docks & Piers
- Void Fill
- Ramps & Bridge Approaches
- Freezers & Cold Storage
- Drainage Board
- Pre-cast/Pre-stressed Concrete Panels
- Road Base
- Foundations
- Retaining Walls

Advantages

- **Environmentally Friendly.** R-Tech X does not contain any ozone depleting blowing agents or dyes, may contain recycled material and the foam core is 100% recyclable.
- **Moisture Resistance.** R-Tech facers provide a surface that is virtually impervious to moisture and the InsulFoam EPS core does not readily absorb moisture from the environment.
- **Stable R-Value.** The product's thermal properties will remain stable over its entire service life.
- **Long Term Warranty.** With no thermal drift, Insulfoam warrants this product with a 20-Year Thermal Performance Warranty.
- **Varying Compressive Strengths.** More available compressive strengths than comparable below grade products.
- **Code Approvals.** Insulfoam insulations are recognized by the International Code Council Evaluation Service (ICC-ES), for numerous applications. Please contact your local Insulfoam representative for details.
- **Insect and Mold Resistance.** R-Tech X is manufactured with an inert additive that deters termites and carpenter ants. R-Tech X does not sustain mold and mildew growth.

- **Jobsite Durability.** With a polymeric facer on either side of it, R-Tech X is extremely flexible and durable.
- **Cost Effective.** R-Tech X is typically less expensive than other comparable insulation products.
- **Proven Performance.** EPS has been manufactured using the same chemistry since the mid-1950s, providing proven performance.
- **Enhanced R-values.** In certain applications, increased R-Values can be obtained by placing the metallic reflective side of the R-Tech X towards a dead air space. R-Value gain is dependent on the amount of dead air space between the R-Tech and outer surface. R-Value gains are based on the ASHRAE Handbook of Fundamentals. See the attached Effective R-Value chart.
- **User Friendly.** R-Tech X can be ordered with the InsulSnap™ feature which scores the product longitudinally at any pre-ordered interval (commonly 16" or 24" o.c.). The InsulSnap feature minimizes labor by enabling the installer to cleanly break the product at the desired width while also minimizing product breakage and waste.

Sizes

R-Tech X is available in 4' x 8' sheets with thicknesses from 3/8" to 5" in 1/8" increments. R-Tech can also be ordered with the InsulSnap feature which allows the end user to cleanly break the 4' x 8' sheets into any desired width. R-Tech X is available with metallic reflective and InsulFoam white facers. In addition, custom sizes and densities are available upon request with little or no impact on lead time.

Installation Recommendations

Please refer to the appropriate R-Tech Below Grade installation guidelines for recommended installation procedures, available at www.insulfoam.com or by asking your local Representative.

R-TECH[®]

BELOW GRADE INSULATION

BY INSULFOAM

Product Feature Summary

Product Features	R-Tech X	Type X XPS
Stable R-value	Yes	No
Free of HCFCs and Dyes	Yes	No
Available with Metallic Reflective Films	Yes	No
Available in a wide range of sizes and thicknesses	Yes	No

Key Product Comparisons

Property	R-Tech X	Type X XPS	Test Method
Density (min. pcf)	1.35	1.30	ASTM C303
Compressive Strength (psi, 10% deformation)	15	15	ASTM D1621
Flexural Strength (psi)	40	40	ASTM C203
Water Absorption (max. % vol.)	0.3	0.3	ASTM C272
Water Vapor Permeance (max. perm.)	< 1.5	1.5	ASTM E96
Dimensional Stability (maximum %)	2.0	2.0	ASTM D2126
Flame Spread	< 25	< 25	ASTM E84
Smoke Developed	< 450	< 450	ASTM E84

R-Value Comparisons

R-Value	R-Tech X	Type X XPS	Test Method
Warranted R-Values @ 20 years	4.6/inch	Not Warranted	ASTM C518 @ 40 °F
	4.2/inch	Not Warranted	@ 75 °F
Warranted R-Values @ 15 years	4.6/inch	4.9/inch	ASTM C518 @ 40 °F
	4.2/inch	4.5/inch	@ 75 °F
Published R-Value (Thermal Resistance)	4.6/inch	5.4/inch	ASTM C518 @ 40 °F
	4.2/inch	5.0/inch	@ 75 °F

Effective R-Values* (metallic-reflective facer & dead air space)

R-Tech X Thickness	Design Temp.	Effective R-Value * (R-Tech MR + Air Space)
0.5"	40 °F	5.30
	75 °F	5.10
0.75"	40 °F	6.45
	75 °F	6.15
1.00"	40 °F	7.60
	75 °F	7.20
1.25"	40 °F	8.75
	75 °F	8.25
1.50"	40 °F	9.90
	75 °F	9.30
1.75"	40 °F	11.05
	75 °F	10.35
2.00"	40 °F	12.20
	75 °F	11.40
2.25"	40 °F	13.35
	75 °F	12.45
2.50"	40 °F	14.50
	75 °F	13.50

* Requires 0.75" - 3.50" dead air space and the R-Tech metallic-reflective facer towards the dead air space.

