



RIGID EXTERIOR FOUNDATION FACED INSULATION & DRAINAGE BOARD

Description

InsulFoam DB Faced Drainage Board is a high-performance, rigid insulation consisting of a superior closed-cell, lightweight and resilient expanded polystyrene (EPS) with an optional advanced filtration facer. The core of InsulFoam DB has ¼" x ¼" drainage channels every 2" O.C. and is the same high-quality as our InsulFoam brand insulations. InsulFoam DB has excellent dimensional stability, compressive strength and drainage capacity properties.

Uses

Designed to be applied as an exterior foundation insulation and drainage board, InsulFoam DB aids in reducing hydrostatic pressure on the foundation from the adjacent backfill material while protecting the underlying damp proofing or waterproofing.

Advantages

- **Long-Term Effectiveness.** The InsulFoam DB facer prevents accumulation of the backfill material within the drainage channels unlike some unfaced grooved boards.
- **Added Protection.** InsulFoam DB provides protection to the waterproofing or damp-proofing and to the foundation during backfill installation and from any post-construction soil freeze-thaw cycling and settlement.
- **Stable R-Value.** The product's thermal properties will remain stable over the entire service-life.
- **Long Term Warranty.** With no thermal drift, Insulfoam warrants this product with a 20-year Thermal Performance Warranty.
- **Cost Effective.** InsulFoam DB is typically less expensive than other below-grade or perimeter insulations.
- **Water Resistance.** Insulfoam Below Grade Insulations do not readily absorb moisture from the environment.
- **Insect and Mold Resistance.** InsulFoam DB does not sustain mold and mildew growth and can be manufactured with an inert additive that deters termites and carpenter ants.
- **Proven Performance.** The same fundamental chemistry has been used in product manufacturing since the mid-1950s (65+ years) providing proven product performance.
- **Environmentally Friendly.** Is 100% recyclable, does not contain any ozone-depleting blowing agents, and may contain recycled material.
- **Code Approvals.** Insulfoam insulations are recognized by the International Code Council Evaluation Service (ICC-ES), for numerous applications. Please contact your local Insulfoam representative for details.

TIME TESTED PROTECTION.




Sizes

InsulFoam DB is offered in an assortment of sizes and shapes and is readily available in custom lengths, widths and densities with little to no impact on lead time.

Performance Property

Property	Test Method	Value
Drainage Capacity @ 1200 psf, gradient .19	ASTM D4716	5 gal/min/ft

Typical Foundation Drainage Application

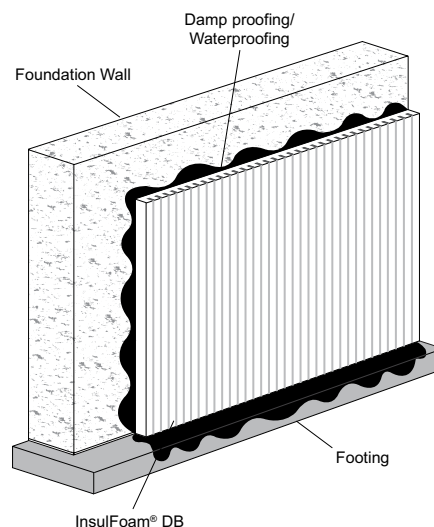

Installation Recommendations

Please refer to the appropriate Insulfoam Below Grade installation guidelines for recommended installation procedures, available at www.insulfoam.com or by asking your local Insulfoam Representative.